



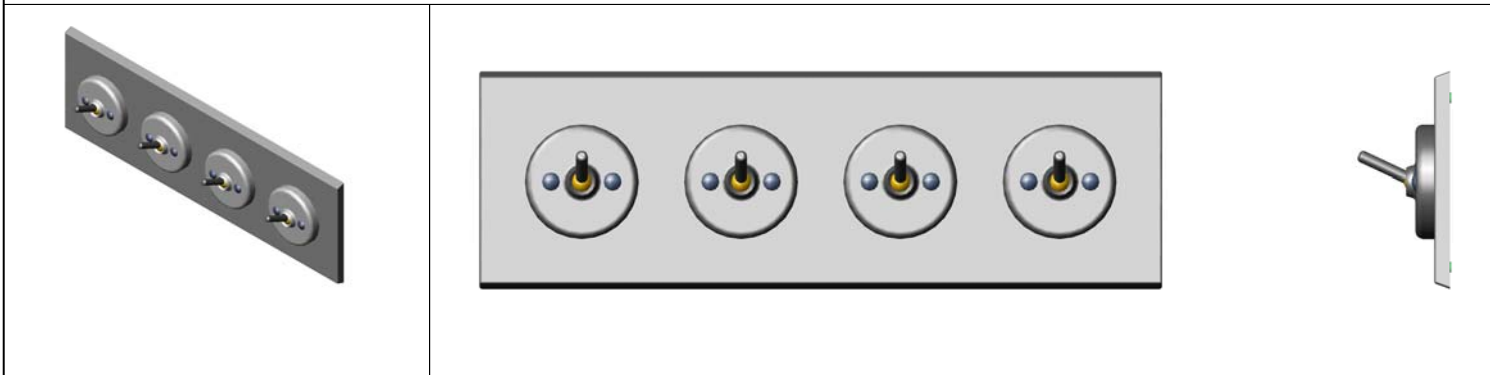

Technical Data

S-4037-SS

CONCEALED MOUNT SECURITY HOOK STRIP

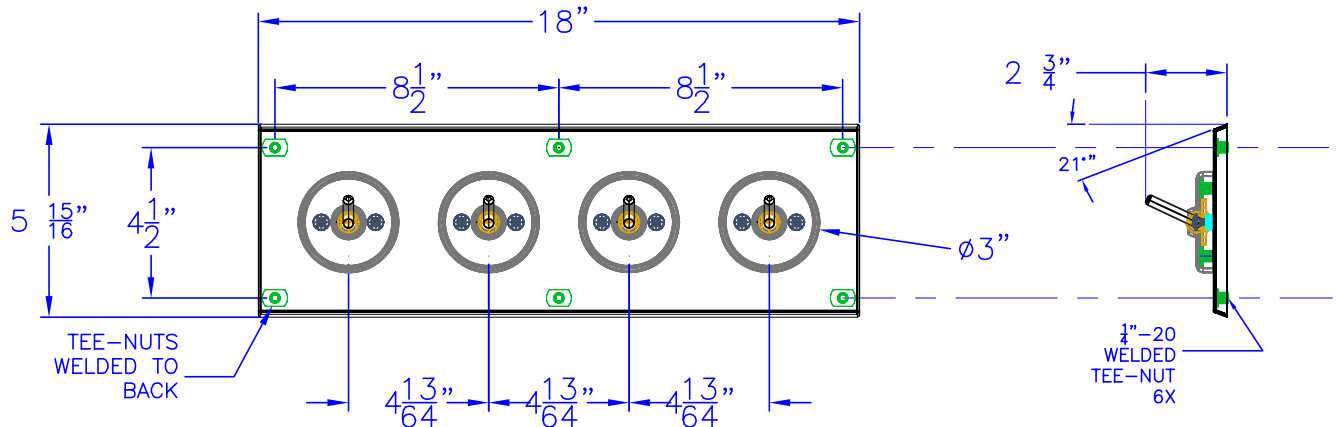

Construction:

FLANGE: 11 GAUGE X 3" DIAMETER TYPE 304 STAINLESS STEEL.

HOOK: 5/16" DIAMETER STAINLESS STEEL ROD WITH PIVOTING BALL JOINT THAT RELEASES UNDER EXCESSIVE LOAD.

WALL PLATE: 14 GAUGE TYPE 304 STAINLESS STEEL, FORMED AND WELDED FOR ONE PIECE CONSTRUCTION, WITH (4) SECURITY TOWEL HOOKS PRE-FASTEN TO WALL PLATE. TEE-NUTS WELDED TO BACK (6X) FOR CONCEALED MOUNTING.

Operation:

4 INDIVIDUAL SECURITY HOOKS PRE-FASTEN TO WALL PLATE.

EACH HOOK HAS PIVOTING BALL JOINT AND RELEASES WHEN EXCESSIVE LOAD IS APPLIED. THE HOOK CAN BE RESET BY HAND WHEN REQUIRED.

Installation:

USE WALL PLATE TO MARK HOLES AT DESIRED HEIGHT.

WALL PLATE HAS (6) 1/4" - 20 TEE-NUTS WELDED TO BACK FOR CONCEALED MOUNTING. ACCESS TO BEHIND THE WALL IS REQUIRED.

FASTEN TO WALL. WALL STUDS ARE NOT PROVIDED.

CAUTION: UNIT IS ONLY AS STRONG AS THE ANCHORING DEVICES AND THE WALL IN WHICH IT IS MOUNTED TO.

Guide Specification:

CONCEALED MOUNT SECURITY TOWEL HOOK STRIP WITH (4) HOOKS

EACH HOOK RELEASES WHEN EXCESSIVE LOAD IS APPLIED.

HOOK IS RESET WHEN REQUIRED.

ONE PIECE CONSTRUCTION.

SATIN #4 FINISH.

ACCESS TO BEHIND THE WALL IS REQUIRED FOR MOUNTING.

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation

© Copyright 2005
Brey-Krause Manufacturing

Brey-Krause Manufacturing
1209 West Lehigh Street, Bethlehem, PA 18018
Phone: 610.867.1401 Fax: 610.866.1433
www.breykrause.com